


Connection distributor - PSM PTK-4 - 2799364

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Passive RS-485 T-distributor, fitted with one 9-pin D-SUB pin strip and five 9-pin D-SUB socket strips



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 074050
GTIN	4017918074050

Technical data

Dimensions

Width	89.8 mm
Height	89.6 mm
Length	39 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C
---------------------------------	------------------

General

Nominal voltage U_N	60 V AC/DC
Nominal current I_N	1 A
Bus system	RS-485
Shielding	D-SUB frame
Test voltage	500 V AC (50 Hz, 1 min, rms)
Housing material	PVC
Flammability rating according to UL 94	V0
Pin assignment	all 1:1

Connection data

Connection	Incoming
------------	----------

Connection distributor - PSM PTK-4 - 2799364

Technical data

Connection data

Number of positions	9
Connection method	D-SUB 9 plug
Connection	Outgoing
Number of positions	9
Connection method	D-SUB-9 female connector
Connection	Branching
Number of positions	9
Connection method	4 x D-SUB-9 socket

Conformance/approvals

Designation	EAC
Identification	EAC

Standards and Regulations


Free from substances that could impair the application of coating	according to P-VW 3.10.7 57 65 0 VW-AUDI-Seat central standard
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Circuit diagram

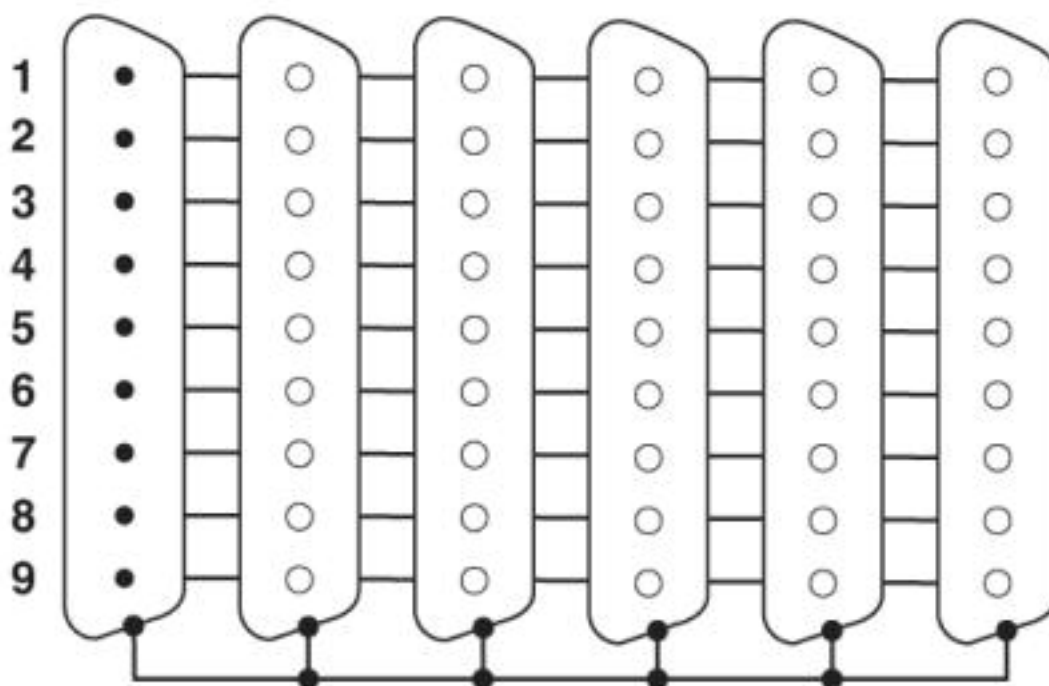

Connection distributor - PSM PTK-4 - 2799364

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		EAC-Zulassung
-----	---	---------------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>