




Wandleuchten - Deckenleuchten | 220-240 V
1 Module 18 W DC 500 mA | CRI 80 | Tageslichtweiß
9171



Technische Daten	
Designer	Linea Light
Jahr der Verwirklichung	2020
Typ	- - -
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Optik	General Lighting
Lampenleistung	18 W
Ähnlichste Farbtemperatur / Tone	2700 - 3000 - 4000
Lichtstrom (Lichtquelle)	1800 lm
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tone	Tageslichtweiß
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP54
IK	IK10
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.895 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Gehäuse	
Material	PMMA
Farbe	Weiß

Oberfläche Diffusor	
Material	PMMA
Farbe	Opal

Wandleuchten - Deckenleuchten | 220-240 V | 1 Module 18 W DC 500 mA | CRI 80 |
 Tageslichtweiß | Farbtemperatur: 2700 K
9171

Single emission wall lights or ceiling lights for outdoor application. The natural white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 2700-3000-4000 K and a CRI 80; the source luminous flux is 1800 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma. The ingress protection degree is IP54; the total weight is of 0.895 kg.

The total absorbed power is W.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften


Light Output Ratio (LOR)	89 %
Lichtstrom (Lichtquelle)	1800 lm
Leuchten Lichtstrom	1616 lm
Consumption	18 W
Leuchten Lichtausbeute	89 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25

LED Life / Failure Ratio

L70 B20 C0 72500h

OPTICAL

Light distribution simmetry	Symmetrical
Optik C0/C180	112°

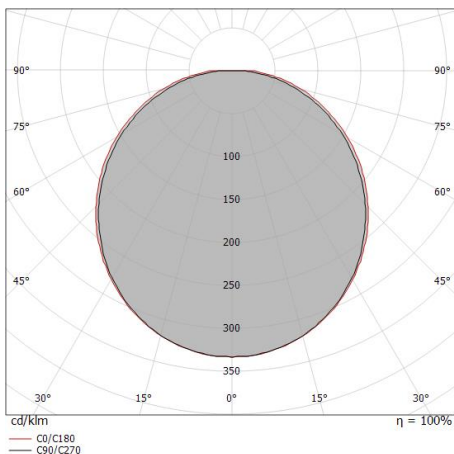

Wandleuchten - Deckenleuchten | 220-240 V | 1 Module 18 W DC 500 mA | CRI 80 |

Tageslichtweiß | Farbtemperatur: 3000 K

9171

Single emission wall lights or ceiling lights for outdoor application. The natural white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 2700-3000-4000 K and a CRI 80; the source luminous flux is 1800 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma. The ingress protection degree is IP54; the total weight is of 0.895 kg.

The total absorbed power is W.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften


Light Output Ratio (LOR)	92 %
Lichtstrom (Lichtquelle)	1800 lm
Leuchten Lichtstrom	1665 lm
Consumption	18 W
Leuchten Lichtausbeute	92 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25

LED Life / Failure Ratio

L70 B20 C0 72500h

OPTICAL

Light distribution simmetry	Symmetrical
Optik C0/C180	112°

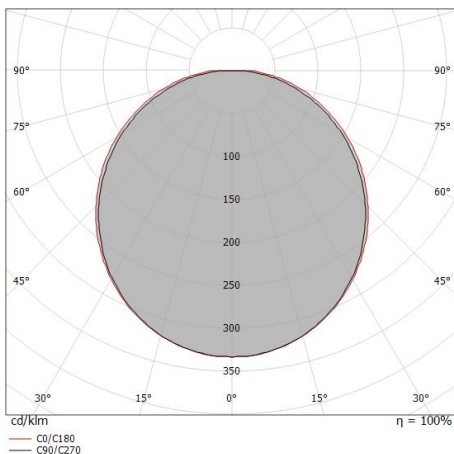

Wandleuchten - Deckenleuchten | 220-240 V | 1 Module 18 W DC 500 mA | CRI 80 |

Tageslichtweiß | Farbtemperatur: 4000 K

9171

Single emission wall lights or ceiling lights for outdoor application. The natural white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 2700-3000-4000 K and a CRI 80; the source luminous flux is 1800 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma. The ingress protection degree is IP54; the total weight is of 0.895 kg.

The total absorbed power is W.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	95 %
Lichtstrom (Lichtquelle)	1800 lm
Leuchten Lichtstrom	1716 lm
Consumption	18 W
Leuchten Lichtausbeute	95 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25

LED Life / Failure Ratio

L70 B20 C0 72500h

OPTICAL

Light distribution simmetry	Symmetrical
Optik C0/C180	112°

